



CR1000

measurement & control datalogger



A rugged

instrument with

research-grade

performance.

CR1000 Measurement and Control System

The CR1000 provides precision measurement capabilities in a rugged, battery-operated package. It consists of a measurement and control module and a wiring panel. Standard operating range is -25° to +50°C; an optional extended range of -55° to +85°C is available.



Features

- 4 Mbyte memory*
- Program execution rate of up to 100 Hz
- CS I/O and RS-232 serial ports
- 13-bit analog to digital conversions
- 16-bit H8S Renesas Microcontroller with 32-bit internal CPU architecture
- Temperature compensated real-time clock
- Background system calibration for accurate measurements over time and temperature changes
- Single DAC used for excitation and measurements to give ratio metric measurements
- Gas Discharge Tube (GDT) protected inputs
- Data values stored in tables with a time stamp and record number
- Battery-backed SRAM memory and clock ensuring data, programs, and accurate time are maintained while the CR1000 is disconnected from its main power source
- Serial communications with serial sensors and devices supported via I/O port pairs
- PAKBus®, Modbus, DNP3, TCP/IP, FTP, and SMTP protocols supported

Measurement and Control Module

The module measures sensors, drives direct communications and telecommunications, reduces data, controls external devices, and stores data and programs in on-board, non-volatile storage. The electronics are RF shielded and glitch protected by the sealed, stainless steel canister. A battery-backed clock assures accurate timekeeping. The module can simultaneously provide measurement and communication functions. The on-board, BASIC-like programming language supports data processing and analysis routines.

Wiring Panel

The CR1000WP is a black, anodized aluminum wiring panel that is compatible with all CR1000 modules. The wiring panel includes switchable 12 V, redistributed analog grounds (dispersed among analog channels rather than grouped), unpluggable terminal block for 12 V connections, gas-tube spark gaps, and 12 V supply on pin 8 to power our COM-series phone modems and other peripherals. The control module easily disconnects from the wiring panel allowing field replacement without rewiring the sensors. A description of the wiring panel's input/output channels follows.

*Originally, the standard CR1000 had 2 MB of data/program storage, and an optional version, the CR1000-4M, had 4 MB of memory. In September 2007, the standard CR1000 started having 4 MB of memory, making the CR1000-4M obsolete. Dataloggers that have a module with a serial number greater than or equal to 11832 will have a 4 MB memory. The 4 MB dataloggers will also have a sticker on the canister stating "4M Memory".

Analog Inputs

Eight differential (16 single-ended) channels measure voltage levels. Resolution on the most sensitive range is 0.67 µV.

Pulse Counters

Two pulse channels can count pulses from high level (5 V square wave), switch closure, or low level AC signals.

Switched Voltage Excitations

Three outputs provide precision excitation voltages for resistive bridge measurements.

Digital I/O Ports

Eight ports are provided for frequency measurements, digital control, and triggering. Three of these ports can also be used to measure SDM devices. The I/O ports can be paired as transmit and receive. Each pair has 0 to 5 V UART hardware that allows serial communications with serial sensors and devices. An RS232-to-logic level converter may be required in some cases.

CS I/O Port

AC-powered PCs and many communication peripherals connect with the CR1000 via this port. Connection to an AC-powered PC requires either an SC32B or SC-USB interface. These interfaces isolate the PC's electrical system from the datalogger, thereby protecting against ground loops, normal static discharge, and noise.

RS-232 Port

This non-isolated port is for connecting a battery-powered laptop, serial sensor, or RS-232 modem. Because of ground loop potential on some measurements (e.g., low level single-ended measurements), AC-powered PCs should use the CS I/O port instead of the RS-232 port (see above).

Peripheral Port

One 40-pin port interfaces with the NL115 Ethernet Interface & CompactFlash Module, the NL120 Ethernet Interface, or the CFM100 CompactFlash® Module.

Switched 12 Volt

This terminal provides unregulated 12 V that can be switched on and off under program control.

Storage Capacity

The CR1000 has 2 MB of flash memory for the Operating System, and 4 MB of battery-backed SRAM for CPU usage, program storage, and data storage. Data is stored in a table format. The storage capacity of the CR1000 can be increased by using a CompactFlash card.

Communication Protocols

The CR1000 supports the PAKBUS, Modbus, DNP3, TCP/IP, FTP, and SMTP communication protocols. With the PAKBUS protocol, networks have the distributed routing intelligence to continually evaluate links. Continually evaluating links optimizes delivery times and, in the case of delivery failure, allows automatic switch over to a configured backup route.

The Modbus RTU protocol supports both floating point and long formats. The datalogger can act as a slave and/or master.

The DNP3 protocol supports only long data formats. The dataloggers are level 2 slave compliant, with some of the operations found in a level 3 implementation.

The TCP/IP, FTP, and SMTP protocols provide TCP/IP functionality when the CR1000 is used in conjunction with an NL200, NL115, or NL120. Refer to the CR1000 manual for more information.

Power Supplies

Typically, the CR1000 is powered with a PS200, PS100, or BPALK. The PS200 and PS100 provide a 7-Ah sealed rechargeable battery that should be connected to a charging source (either a wall charger or solar panel). The BPALK consists of eight non-rechargeable D-cell alkaline batteries with a 7.5-Ah rating at 20°C.

Also available are the BP12 and BP24 battery packs, which provide nominal ratings of 12 and 24 Ah, respectively. These batteries should be connected to a regulated charging source (e.g., a CH200 or CH100 connected to a unregulated solar panel or wall charger).

The PS200 (at right) and CH200 are microcontroller-based smart chargers that have two input terminals that allow simultaneous connection of two charging sources.



Enclosure/Stack Bracket

A CR1000 housed in a weather-resistant enclosure can collect data under extremely harsh conditions. The 28960 Enclosure Stack Mounting Kit allows a small peripheral to be placed under the mounting bracket, thus conserving space.

Data Storage and Retrieval Options

To determine the best option for an application, consider the accessibility of the site, availability of services (e.g., cellular phone or satellite coverage), quantity of data to collect, and desired time between data-collection sessions. Some communication options can be combined—increasing the flexibility, convenience, and reliability of the communications.

Keyboard Display

The CR1000KD can be used to program the CR1000, manually initiate data transfer, and display data. The CR1000KD displays 8 lines x 21 characters (64 x 128 pixels) and has a 16-character keyboard. Custom menus are supported allowing customers to set up choices within the datalogger program that can be initiated by a simple toggle or pick list.

One CR1000KD can be carried from station to station in a CR1000 network.



iOS Devices, Android Devices, and PDAs

An iOS device, an Android device, our Archer-PCON Field PC, or a user-supplied PDA can be used to view and collect data, set the clock, and download programs. To use an iOS or Android device, go to the Apple Store or Google Play and purchase our LoggerLink Mobile Apps. User-supplied PDAs require either PConnect or PConnectCE software.

Direct Links

AC-powered PCs connect with the datalogger's CS I/O port via an SC32B or SC-USB interface. These interfaces provide optical isolation. A battery-powered laptop can be attached to the CR1000's RS-232 port via an RS-232 cable—no interface required.

External Data Storage Devices

A CFM100 or NL115 module can store the CR1000's data on an industrial-grade CompactFlash (CF) card. The CR1000 can also store data on an SC115 2-GB Flash Memory Drive.

Mountable Displays

The CD100 and CD295 can be mounted in an enclosure lid. The CD100 has the same functionality and operation as the CD1000KD, allowing both data entry and display without opening the enclosure. The CD295 displays real-time data only.

Short Haul Modems

The SRM-5A RAD Short Haul Modem supports communications between the CR1000 and a PC via a four-wire unconditioned line (two twisted pairs).

Multidrop Interface

The MD485 intelligent RS-485 interface permits a PC to address and communicate with one or more dataloggers over the CABLE2TP two-twisted pair cable. Distances up to 4000 feet are supported.

Internet and IP Networks

Our NL200, NL120, NL115, or NL100 interfaces enables the CR1000 to communicate over a local network or a dedicated Internet connection via TCP/IP. The NL115 can also store data on a CompactFlash card.

Radios


Radio frequency (RF) communications are supported via narrow-band UHF, narrow-band VHF, spread spectrum, or meteor burst radios. Line-of-sight is required for all of our RF options.

Telephone Networks

The CR1000 can communicate with a PC using landlines, cellular CDMA, or cellular GPRS transceivers. A voice synthesized modem enables anyone to call the CR1000 via phone and receive a verbal report of real-time site conditions.

Satellite Transmitters

Our NESDIS-certified GOES satellite transmitter provides one-way communications from a Data Collection Platform (DCP) to a receiving station. We also offer an Argos transmitter that is ideal for high-altitude and polar applications.

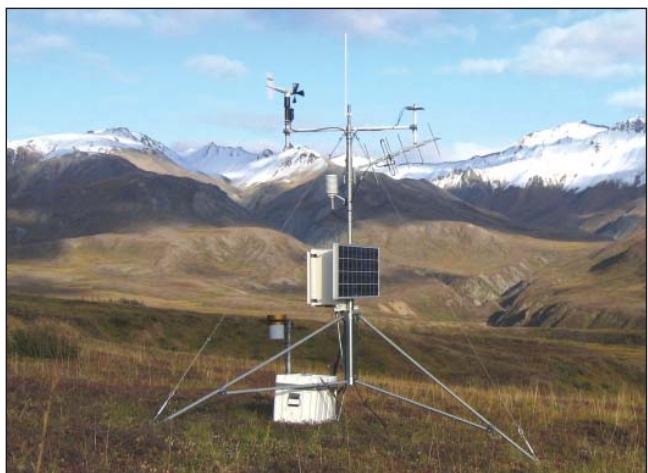

This weather station at Denali National Park, Alaska, transmits data via a GOES satellite transmitter.

Channel Expansion

4-Channel Low Level AC Module


The LLAC4 is a small peripheral device that allows customers to increase the number of available low-level ac inputs by using control ports. This module is often used to measure up to four anemometers, and is especially useful for wind profiling applications.

Synchronous Devices for Measurement (SDMs)

SDMs are addressable peripherals that expand the datalogger's measurement and control capabilities. For example, SDMs are available to add control ports, analog outputs, pulse count channels, interval timers, or even a CANbus interface to the system. Multiple SDMs, in any combination, can be connected to one datalogger.

Multiplexers

Multiplexers increase the number of sensors that can be measured by a CR1000 by sequentially connecting each sensor to the datalogger. Several multiplexers can be controlled by a single CR1000.

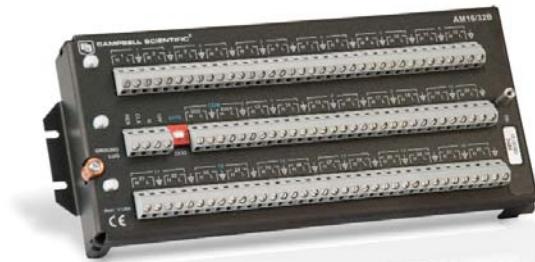

The CR1000 is compatible with the AM16/32B (shown above) and AM25T multiplexers.

Software


Starter Software

Our easy-to-use starter software is intended for first time users or applications that don't require sophisticated communications or datalogger program editing. SCWin Short Cut generates straight-forward CR1000 programs in four easy steps. PC200W allows customers to transfer a program to, or retrieve data from a CR1000 via a direct communications link.

At www.campbellsci.com/downloads you can download starter software at no charge. Our Resource CD also provides this software as well as PDF versions of our brochures and manuals.

Datalogger Support Software

Our datalogger support software packages provide more capabilities than our starter software. These software packages contain program editing, communications, and display tools that can support an entire datalogger network.

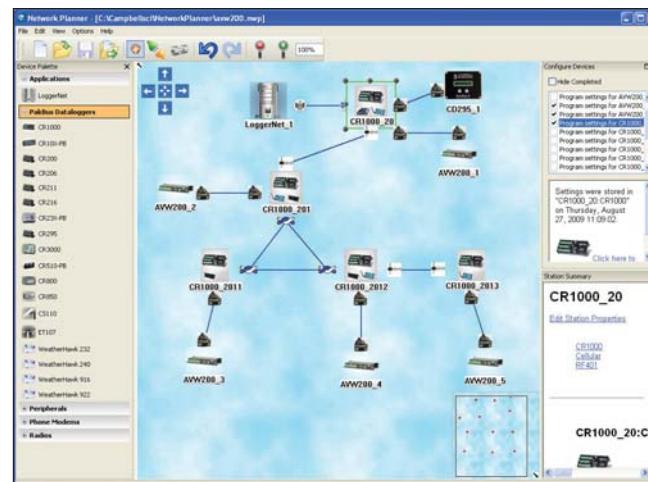


The Network Planner, included in LoggerNet 4 or higher, generates device settings and configures the LoggerNet network map for PakBus networks.

PC400, our mid-level software, supports a variety of telemetry options, manual data collection, and data display. For programming, it includes both Short Cut and the CRBasic program editor. PC400 does not support combined communication options (e.g., phone-to-RF), PakBus® routing, or scheduled data collection.

RTDAQ is an ideal solution for industrial and real-time users desiring to use reliable data collection software over a single telecommunications medium, and who do not rely on scheduled data collection. RTDAQ's strength lies in its ability to handle the display of high speed data.

LoggerNet is Campbell Scientific's full-featured datalogger support software. It is referred to as "full-featured" because it provides a way to accomplish almost all the tasks you'll need to complete when using a datalogger. LoggerNet supports combined communication options (e.g., phone-to-RF) and scheduled data collection.

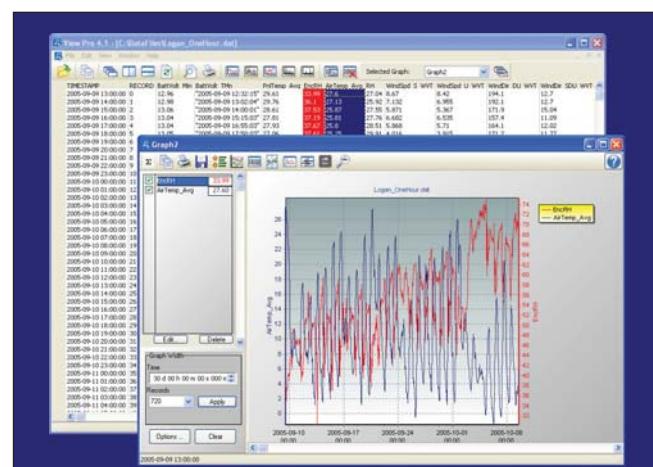

Both LoggerNet and RTDAQ use View Pro to display historical data in a tabular or graphical format.

Applications

The measurement precision, flexibility, long-term reliability, and economical price of the CR1000 make it ideal for scientific, commercial, and industrial applications.

Meteorology

The CR1000 is used in long-term climatological monitoring, meteorological research, and routine weather measurement applications.



Our rugged, reliable weather station measures meteorological conditions at St. Mary's Lake, Glacier National Park, MT.

Sensors the CR1000 can measure include:

- cup, propeller, and sonic anemometers
- tipping bucket rain gages
- wind vanes
- pyranometers
- ultrasonic ranging sensor
- thermistors, RTDs, and thermocouples
- barometric pressure sensors
- RH sensors
- cooled mirror hygrometers

Wind Profiling

Our data acquisition systems can monitor conditions at wind assessment sites, at producing wind farms, and along transmission lines. The CR1000 makes and records measurements, controls electrical devices, and can function as PLCs or RTUs. Because the datalogger has its own power supply (batteries, solar panels), it can continue to measure and store data and perform control during power outages.

Typical sensors for wind assessment applications include, but are not limited to:

- sonic anemometers
- three-cup and propeller anemometers (up to 10 anemometers can be measured by using two LLAC4 peripherals)
- wind vanes
- temperature sensors
- barometric pressure
- wetness
- solar radiation



Photo courtesy npower renewables

For turbine performance applications, the CR1000 monitors electrical current, voltage, wattage, stress, and torque.

Agriculture and Agricultural Research

The versatility of the CR1000 allows measurement of agricultural processes and equipment in applications such as:

- plant water research
- canopy energy balance
- machinery performance
- plant pathology
- crop management decisions
- food processing/storage
- frost prediction
- irrigation scheduling
- integrated pest management



This viticulture site in Australia integrates meteorological, soil, and crop measurements.

Soil Moisture

The CR1000 is compatible with the following soil moisture measurement technologies:

- Soil moisture blocks are inexpensive sensors that estimate soil water potential.
- Matric water potential sensors also estimate soil water potential but are more durable than soil moisture blocks.
- Time-Domain Reflectometry Systems (TDR) use a reflectometer controlled by a CR1000 to accurately measure soil water content. Multiplexers allow sequential measurement of a large number of probes by one reflectometer, reducing cost per measurement.
- Self-contained water content reflectometers are sensors that emit and measure a TDR pulse.
- Tensiometers measure the soil pore pressure of irrigated soils and calculate soil moisture.

Air Quality

The CR1000 can monitor and control gas analyzers, particle samplers, and visibility sensors. It can also automatically control calibration sequences and compute conditional averages that exclude invalid data (e.g., data recorded during power failures or calibration intervals).

Road Weather/RWIS

Our fully NTCIP-compliant Environmental Sensor Stations (ESS) are robust, reliable weather stations used for road weather/RWIS applications. A typical ESS includes a tower, CR1000, two road sensors, remote communication hardware, and sensors that measure wind speed and direction, air temperature, humidity, barometric pressure, solar radiation, and precipitation.

Water Resources/Aquaculture

Our CR1000 is well-suited to remote, unattended monitoring of hydrologic conditions. Most hydrologic sensors, including SDI-12 probes, interface directly to the CR1000. Typical hydrologic measurements:

- **Water level** is monitored with incremental shaft encoders, double bubblers, ultrasonic ranging sensors, resistance tapes, strain gage pressure transducers, or vibrating wire pressure transducers. Vibrating wire transducers require an AVW200-series or another vibrating wire interface.
- **Ionic conductivity** measurements use one of the switched excitation ports from the CR1000.
- **Samplers** are controlled by the CR1000 as a function of time, water quality, or water level.
- **Alarm and pump actuation** are controlled through digital I/O ports that operate external relay drivers.



A turbidity sensor was installed in a tributary of the Cedar River watershed to monitor water quality conditions for the city of Seattle, Washington.

Vehicle Testing

This versatile, rugged datalogger is ideally suited for testing cold and hot temperature, high altitude, off-highway, and cross-country performance. The CR1000 is compatible with our SDM-CAN interface and GPS16X-HVS receiver.



Vehicle monitoring includes not only passenger cars, but airplanes, locomotives, helicopters, tractors, buses, heavy trucks, drilling rigs, race cars, and motorcycles.

The CR1000 can measure:

- **Suspension**—strut pressure, spring force, travel, mounting point stress, deflection, ride
- **Fuel system**—line and tank pressure, flow, temperature, injection timing
- **Comfort control**—fan speed, ambient and supply air temperature, refrigerant pressures, solar radiation, ac on and off, time-to-comfort, blower current
- **Brakes**—line pressure, pedal pressure and travel, ABS, line and pad temperature
- **Engine**—pressure, temperature, crank position, RPM, time-to-start, oil pump cavitation
- **General vehicle**—chassis monitoring, road noise, vehicle position and speed, steering, air bag, hot/cold soaks, wind tunnels, traction, CANbus, wiper speed and current, vehicle electrical loads

Other Applications

- Eddy covariance systems
- Wireless sensor/datalogger networks
- Mesonet systems
- Avalanche forecasting, snow science, polar, high altitude
- Fire weather
- Geotechnical
- Historic preservation

CR1000 Specifications

Electrical specifications are valid over a -25° to +50°C range unless otherwise specified; non-condensing environment required. To maintain electrical specifications, Campbell Scientific recommends recalibrating dataloggers every two years. We recommend that the system configuration and critical specifications are confirmed with Campbell Scientific before purchase.

PROGRAM EXECUTION RATE

10 ms to one day @ 10 ms increments

ANALOG INPUTS (SE1-SE16 or DIFF1-DIFF8)

8 differential (DF) or 16 single-ended (SE) individually configured. Channel expansion provided by AM16/32B and AM25T multiplexers.

RANGES and RESOLUTION: Basic resolution (Basic Res) is the A/D resolution of a single conversion. Resolution of DF measurements with input reversal is half the Basic Res.

Range (mV) ¹	DF Res (µV) ²	Basic Res (µV)
±5000	667	1333
±2500	333	667
±250	33.3	66.7
±25	3.33	6.7
±7.5	1.0	2.0
±2.5	0.33	0.67

¹Range overhead of ~9% on all ranges guarantees that full-scale values will not cause over range.

²Resolution of DF measurements with input reversal.

ACCURACY³:

±(0.06% of reading + offset), 0° to 40°C

±(0.12% of reading + offset), -25° to 50°C

±(0.18% of reading + offset), -55° to 85°C (-XT only)

³Accuracy does not include the sensor and measurement noise. The offsets are defined as:

Offset for DF w/input reversal = 1.5-Basic Res + 1.0 µV

Offset for DF w/o input reversal = 3-Basic Res + 2.0 µV

Offset for SE = 3-Basic Res + 3.0 µV

INPUT NOISE VOLTAGE: For DF measurements with input reversal on ±2.5 mV input range; digital resolution dominates for higher ranges.

250 µs Integration: 0.34 µV RMS

50/60 Hz Integration: 0.19 µV RMS

ANALOG MEASUREMENT SPEED:

Integration Type/Code	Integration Time	Settling Time	Total Time ⁵	
			SE w/ No Rev	DF w/ Input Rev
250	250 µs	450 µs	~1 ms	~12 ms
60 Hz ⁴	16.67 ms	3 ms	~20 ms	~40 ms
50 Hz ⁴	20.00 ms	3 ms	~25 ms	~50 ms

⁴AC line noise filter.

⁵Includes 250 µs for conversion to engineering units.

INPUT LIMITS: ±5 V

DC COMMON MODE REJECTION: >100 dB

NORMAL MODE REJECTION: 70 dB @ 60 Hz when using 60 Hz rejection

SUSTAINED INPUT VOLTAGE W/O DAMAGE:

±16 Vdc max.

INPUT CURRENT: ±1 nA typical, ±6 nA max. @ 50°C; ±90 nA @ 85°C

INPUT RESISTANCE: 20 Gohms typical

ACCURACY OF BUILT-IN REFERENCE JUNCTION THERMISTOR (for thermocouple measurements):

±0.3°C, -25° to 50°C

±0.8°C, -55° to 85°C (-XT only)

ANALOG OUTPUTS (Vx1-Vx3)

3 switched voltage, active only during measurement, one at a time.

RANGE AND RESOLUTION: Voltage outputs programmable between ±2.5 V with 0.67 mV resolution.

V, ACCURACY: ±(0.06% of setting + 0.8 mV), 0° to 40°C
±(0.12% of setting + 0.8 mV), -25° to 50°C
±(0.18% of setting + 0.8 mV), -55° to 85°C (-XT only)

V, FREQUENCY SWEEP FUNCTION: Switched outputs provide a programmable swept frequency, 0 to 2500 mV square waves for exciting vibrating wire transducers.

CURRENT SOURCING/SINKING: ±25 mA

RESISTANCE MEASUREMENTS

MEASUREMENT TYPES: The CR1000 provides ratio metric measurements of 4- and 6-wire full bridges, and 2-, 3-, and 4-wire half bridges. Precise, dual polarity excitation using any of the 3 switched voltage excitations eliminates dc errors.

VOLTAGE RATIO ACCURACY⁶: Assuming excitation voltage of at least 1000 mV, not including bridge resistor error.

$$\pm(0.04\% \text{ of voltage reading} + \text{offset})/V_x$$

⁶Accuracy does not include the sensor and measurement noise. The offsets are defined as:

Offset for DF w/input reversal = 1.5-Basic Res + 1.0 µV

Offset for DF w/o input reversal = 3-Basic Res + 2.0 µV

Offset for SE = 3-Basic Res + 3.0 µV

Offset values are reduced by a factor of 2 when excitation reversal is used.

PERIOD AVERAGE

Any of the 16 SE analog inputs can be used for period averaging. Accuracy is ±(0.01% of reading + resolution), where resolution is 136 ns divided by the specified number of cycles to be measured.

INPUT AMPLITUDE AND FREQUENCY:

Voltage Gain	Input Range (±mV)	Signal (peak to peak) ⁷		Min Pulse Width (µV)	Max ⁸ Freq (kHz)
		Min. (mV)	Max (V)		
1	2500	500	10	2.5	200
10	250	10	2	10	50
33	25	5	2	62	8
100	2.5	2	2	100	5

⁷With signal centered at the datalogger ground.

⁸The maximum frequency = 1/(Twice Minimum Pulse Width) for 50% of duty cycle signals.

PULSE COUNTERS (P1-P2)

(2) inputs individually selectable for switch closure, high frequency pulse, or low-level ac. Independent 24-bit counters for each input.

MAXIMUM COUNTS PER SCAN: 16.7x10⁶

SWITCH CLOSURE MODE:

Minimum Switch Closed Time: 5 ms

Minimum Switch Open Time: 6 ms

Max. Bounce Time: 1 ms open w/o being counted

HIGH-FREQUENCY PULSE MODE:

Maximum Input Frequency: 250 kHz

Maximum Input Voltage: ±20 V

Voltage Thresholds: Count upon transition from below 0.9 V to above 2.2 V after input filter with 1.2 µs time constant.

LOW-LEVEL AC MODE: Internal AC coupling removes AC offsets up to ±0.5 V.

Input Hysteresis: 12 mV @ 1 Hz

Maximum ac Input Voltage: ±20 V

Minimum ac Input Voltage:

Sine Wave (mV RMS)	Range(Hz)
20	1.0 to 20
200	0.5 to 200
2000	0.3 to 10,000
5000	0.3 to 20,000

DIGITAL I/O PORTS (C1-C8)

8 ports software selectable, as binary inputs or control outputs. Also provide edge timing, subroutine interrupts/wake up, switch closure pulse counting, high frequency pulse counting, asynchronous communications (UART), SDI-12 communications, and SDM communications.

HIGH-FREQUENCY MAX: 400 kHz

SWITCH CLOSURE FREQUENCY MAX: 150 Hz

EDGE TIMING RESOLUTION: 540 ns

OUTPUT VOLTAGES (no load): high 5.0 V ±0.1 V; low <0.1

OUTPUT RESISTANCE: 330 ohms

INPUT STATE: high 3.8 to 16 V; low -8.0 to 1.2 V

INPUT HYSTERESIS: 1.4 V

INPUT RESISTANCE: 100 kohms

SWITCHED 12 V (SW-12)

One independent 12 V unregulated sources switched on and off under program control. Thermal fuse hold current = 900 mA @ 20°C, 650 mA @ 50°C, 360 mA @ 85°C.

CE COMPLIANCE

STANDARD(S) TO WHICH CONFORMITY IS DECLARED: IEC61326:2002

COMMUNICATIONS

RS-232 PORTS:

9-pin: DCE port for battery-powered computer or non-CSI modem connection.

COM1 to COM4: Four independent Tx/Rx pairs on control ports (non-isolated); 0 to 5 VUART

Baud Rates: selectable from 300 bps to 115.2 kbps.

Default Format: 8 data bits; 1 stop bits; no parity

Optional Formats: 7 data bits; 2 stop bits; odd, even parity

CS I/O PORT: Interface with CSI peripherals

SDI-12: Digital control ports 1, 3, 5, and 7 are individually configured and meet SDI-12 Standard version 1.3 for datalogger mode. Up to ten SDI-12 sensors are supported per port.

PERIPHERAL PORT: 40-pin interface for attaching CompactFlash or Ethernet peripherals

PROTOCOLS SUPPORTED: PakBus, Modbus, DNP3, FTP, HTTP, XML, POP3, SMTP, Telnet, NTCIP, NTP, SDI-12, SDM

CPU AND INTERFACE

PROCESSOR: Renesas H8S 2322 (16-bit CPU with 32-bit internal core)

MEMORY: 2 MB of Flash for operating system; 4 MB of battery-backed SRAM for CPU usage, program storage and data storage.

CLOCK ACCURACY: ±3 min. per year. Correction via GPS optional.

SYSTEM POWER REQUIREMENTS

VOLTAGE: 9.6 to 16 Vdc (reverse polarity protected)

EXTERNAL BATTERIES: 12 Vdc nominal

TYPICAL CURRENT DRAIN:

Sleep Mode: 0.7 mA (0.9 mA max.)

1 Hz Sample Rate (1 fast SE meas.): 1 mA

100 Hz Sample Rate (1 fast SE meas.): 16.2 mA

100 Hz Sample Rate (1 fast SE meas. w/RS-232 communication): 27.6 mA

Optional Keyboard Display On (no backlight): add 7 mA to current drain

Optional Keyboard Display On (backlight on): add 100 mA to current drain

PHYSICAL

DIMENSIONS: 9.4" x 4" x 2.4" (23.9 x 10.2 x 6.1 cm); additional clearance required for serial cable and sensor leads.

WEIGHT: 2.1 lbs (1 kg)

WARRANTY

3-years against defects in materials and workmanship.



Campbell Scientific, Inc. | 815 W 1800 N | Logan, UT 84321-1784 | (435) 227-9000 | www.campbellsci.com
AUSTRALIA | BRAZIL | CANADA | COSTA RICA | ENGLAND | FRANCE | GERMANY | SOUTH AFRICA | SPAIN | USA

Copyright © 2004, 2012
Campbell Scientific, Inc.
Printed August 2012